


## Disegni tecnici / Technical drawings

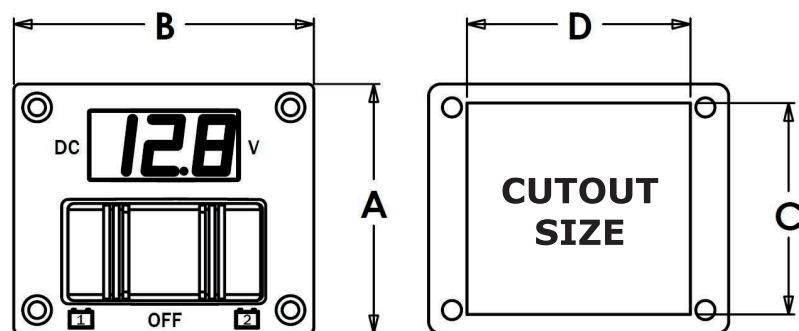


A - 62,5 mm (2-7/16")

B - 75,2 mm (2-15/16")

C - 53 mm (2-1/8")

D - 56 mm (2-3/16")

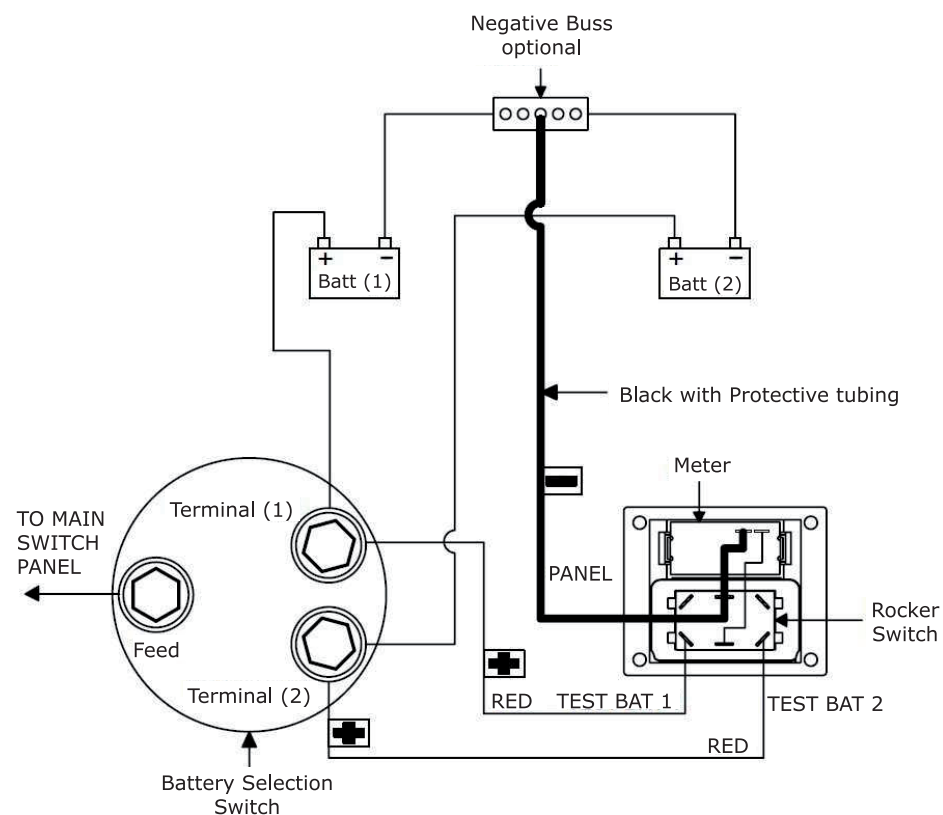

## ITA

## Informazioni tecniche

Il range di tensione misurabile è compreso tra 3V e 30V.  
 Dimensione del ritaglio è 56 x 53 mm.  
 Installare con 4 viti M4.  
 IP65.

## Istruzioni installazione

1. Collegare il cavo rosso dal terminale (1) sull'interruttore a bilancere al morsetto (1) sull'interruttore della batteria, se presente, o al terminale positivo della batteria (1).
2. Collegare il cavo rosso dal terminale (2) sull'interruttore a bilancere al morsetto (2) sull'interruttore della batteria, se presente, o al terminale positivo della batteria (2).
3. Collegare il cavo nero con i tubi di protezione dal contatore al terreno della barca, a cui sono collegati anche i terminali negativi su entrambe le batterie.  
 Maneggiare con cura questo filo dal momento che le connessioni saldate sono fragili.

## ENG

## Technical information

The measurable voltage range is between 3V and 30V.  
 Cutout size is 56 x 53 mm.  
 Install with 4 x M4 screws.  
 IP65.

## Installation Instructions

1. Connect the red wire from terminal (1) on the rocker switch to terminal (1) on the battery selection switch, if so equipped, or to the positive terminal on battery (1).
2. Connect the red wire from terminal (2) on the rocker switch to terminal (2) on the battery selection switch, if so equipped, or to the positive terminal on battery (2).
3. Connect the black wire with protective tubing from the meter to the common ground of the boat, to which the negative terminals on both batteries are also connected.  
 Handle this wire carefully since the soldered connections are fragile.



Tutti i file ( testi e immagini ) contenuti nel seguente documento sono proprietà della Osculati S.p.A., pertanto è vietata la riproduzione integrale o parziale a terzi senza l'autorizzazione scritta e non ne è permesso altro utilizzo. Grazie per la scelta.

All files (text and images) included in the following document are property of Osculati S.p.A., therefore their partial or total reproduction to a third part or any different use without a written authorization is forbidden. Thank you for your choice.

Osculati S.p.A.

via Pacinotti, 12

20090 Segrate (MI)

Tel 02 2699 111; fax 02 2699 1120

[www.osculati.com](http://www.osculati.com); [info@osculati.it](mailto:info@osculati.it)



### Test digitale per batteria

Pannello con interruttori

### Digital Battery Test

Switch Panel

**Code: 14.100.05**