

Gobius, Water and Fuel Tanks, version 3.0

Installation Guide



Before you begin

1. Please make sure that no parts are missing. (3 sensors, 1 panel, 1 control unit (091427), 1 3M cleaning towel, 1 Velcro fastening for the control unit, 3 cables, warranty statement and installation instruction on how to attach the sensors.
2. Determine the best places on your tank to place the sensors and where to place the panel.
3. Determine the best way to safely access electricity from your 12/24 Volts battery.

Quick installation

- Attach the sensors to the tank
- Connect all parts
- Start Gobius
- Change the default settings
- Calibrate when the tank is full
- Control the new settings
- Test and run Gobius
- Plug in to external instrument , lamp or buzzer

Installing the panel and connecting the system

1. Decide where to place the Gobius panel. It can for instance be installed in your pantry or near your holding tank. You may increase the length of the panel cable up to 130 ft with a standard PC network Cat 5 cable.
2. We suggest that you make a small rectangular hole where you want to place the cable from the panel to the control unit. The hole should be at least 0,16 x 0,87 inch. Please see the enclosed hole template at page 5.
3. Use the pre-attached adhesive to fasten the panel to the tank wall.
4. Connect the panel and the sensors to the control unit. Then connect the cables to the battery. Make sure to connect + and – correctly to the battery (+ is white/gray and – is black), as also described on the control unit. Please see the illustration at page 5.
5. If you want to connect Gobius to an external display from VDO, Wema, Faria or others, you should use the analogue output on the control unit together with the enclosed cable.

We recommend that you put a layer of vaseline, which prevents oxidation, on the plugs that are connected to the control unit.




The electronics of the product are protected from damp. The sensors and the control unit do not resist water. Please contact FM Marin for advise on how to make Gobius waterproof. Furthermore, we recommend that you connect your Gobius via a 500 mA fuse.

Attaching the sensors to the tank

Start by reading through the **green** document before attaching the sensors to the tank on levels 1/3, 2/3 and full. Please visit www.gobius.se for latest news. There is also Tank Calculator for making it easier for you to calculate the right levels to put the sensors on the tank wall. Keep in mind that the sensors are sensitive to physical shock and therefore must be handled carefully.

Control of sensors and panel before calibrating the tank (and possible change of default settings)

Connect the Control Unit to the power source and turn the power on. Then as Gobius is starting all lamps are lit, one after another, once. (If Gobius doesn't start press the  button on the panel). After this a function control of the sensors is carried out and each lamp will flash simultaneously with the red lamp.

Finally the blue, green and yellow lamp will show a steady light. This means that Gobius has not yet been calibrated and that you may move on to the next step.


If there should be a problem with one of the sensors, either with the connection or with the sensor itself, this is illustrated by the responding lamp on the panel showing a steady light together with the red lamp. For further information, please see the "table of lights" at page 6.

You must act on this before proceeding with the installation.

If you suspect that the system does not function correctly, please contact our support service by email, support@fmmarin.se, or by phone. The support service is free of charge.


Change of default settings


Gobius is made to be optimized for your unique tank and your requirements. There are differences in tank material, appropriate interval between measurings and connecting an extra gauge alternative of your choice. You will find the predefined settings of Gobius on page 7 of this documentation. If these are not in accordance with your requirements you will need to change them. You will find the available options in the table on page 7.

You change the settings by pressing and holding the  button on the panel. Gobius automatically flicks through the alternatives as presented in the table on page 7. Release the button when your choice is shown. Thereby you have made a new setting. Repeat this until you have made the changes you want.

1. Leave Gobius on
2. With a pen, make notes in the table of the changes you need to do




3. Press and hold the  button until the chosen rows' colours are shown in the panel
4. Release the button to make your choice a setting
5. Repeat this until you have made the changes you want

By keeping the  button pressed until all alternatives are passed, you may flick through all alternatives without making any change of settings. A wrongly chosen setting is corrected by repeating the procedure and thus correcting the setting.

N.B!!! If you change the tank material setting, you will need to redo the calibration.


Settings control

Each and every time you turn off Gobius using the  button, your settings are presented by colour combinations on the panel according to the table on page 7. This will not happen when you turn off Gobius from an external source.


Calibration - your tank must be full

No tanks are the same; there are always differences in e.g. size, thickness, construction and age. In order to compensate for these differences you have to calibrate the system before you start to use your Gobius. To start the calibration, start by making sure that your tank is completely full.

Calibration during installation


1. Start by filling the tank
2. Start Gobius and wait for the blue, yellow and green lights
3. Press and hold the  button until all lights are on
4. Release the button as soon as the lights are on
5. The calibration starts automatically and takes around 30 seconds
6. When the blue light is on the calibration is done

Calibration at a later date

2. When Gobius is on, press the  button
3. Wait until all lights are on
4. Once the lights are on, release the button
5. The calibration starts automatically and takes around 30 seconds
6. When the blue light is on the calibration is done

Analogue instrument

It is possible to plug in an analogue instrument as an alternative way to



show the tank level. In the table on page 7 you will find three alternatives to choose between depending on product and standard.

On page 8 you will find an illustration showing how to plug in the instrument to Gobius' control unit. The extra cable, which is enclosed in the delivery, is intended for this purpose. We assume that you have an instrument with cables already installed in your vessel and that you wish to use this with Gobius.

Extra lamp/buzzer


In addition to the Gobius panel you may want to plug in a lamp or buzzer to give a warning when the tank is full. You may also want to know when the level is below $\frac{1}{4}$ level.

The illustration on page 8 shows how to plug in this additional surveillance.

Finally


If possible, please finalize the installation by emptying and refilling the tank with liquid to verify that Gobius works according to your requirements.

2 different ways of turning Gobius on and off Gobius

You start Gobius by a quick push on the panel's  button or by switching on the current from an external source. A function control on lamps and sensors is immediately performed. When the control is done the level is measured and the correct lamp is lit.

During the measuring you may hear a soft humming sound from each of the sensors. Thereafter a calculation is performed in the control unit and the result is immediately presented by the lighting of the lamp corresponding to the right level.

Each time you start Gobius, it performs a filling measurement in 15 minutes or until the tank is $\frac{3}{4}$ full.

You turn off Gobius by a quick push on the  button or by switching off the current from an external source. When Gobius is turned off it will memorize all settings and the calibration. I.e. you will not need to redo the calibration due to the current being turned off for a lengthy period of time.

Gobius technology (patented)

Each sensor consists of two active parts; a shaker and an accelerator. When the shaker creates a vibration in the tank wall, the accelerator measures the size of the vibration and passes the data on to the control unit. The control unit then starts to calculate in order to give an exact estimate of whether the liquid level has passed the sensor or not. The sensors are set to detect liquid levels through tank walls that are of different materials and thicknesses. If the tank's wall thickness is changing over time (e.g. due to possible contamination), you may need to redo the calibration according to the above instructions.




Gobius requires no extra maintenance

The construction of Gobius has many advantages. For instance, since the sensors never are in direct contact with liquid inside the tank, they will not become worn out. Another positive aspect of Gobius is its low electricity consumption, which is less than 40 mA (12 Volts).

Gobius does not require any extra maintenance. The only thing to remember is to calibrate the tank 1 - 2 times/year.

System Illustration

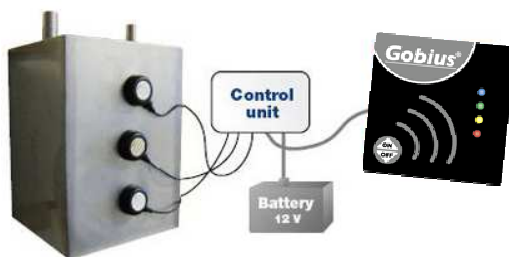

Plug from control unit to the panel



(If you connect the wrong way the blue lamp on the panel will light. It will not damage the product.)


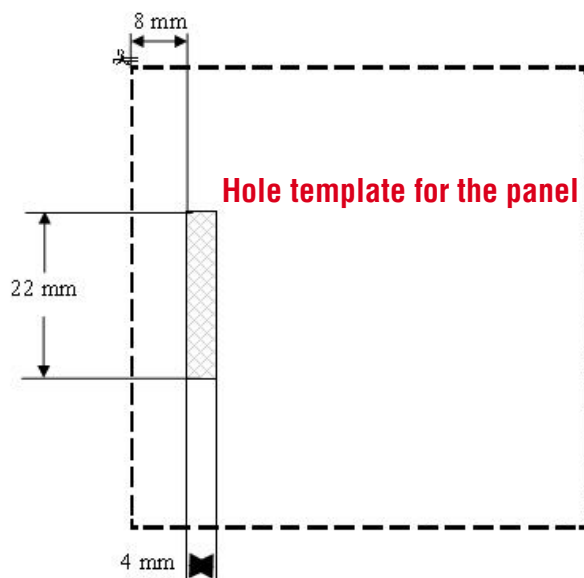




Table of lights – what the lamps on the panel show

Lamp Blue	Lamp Green	Lamp Yellow	Lamp Red	Explanation
○	○	☼	☼	When starting Test of the 1/4-sensor
○	☼	○	☼	Test of the 1/2-sensor
☼	○	○	☼	Test of the 3/4-sensor
○	○	●	●	Sensor errors Sensor test ready, 1/4-sensor not functioning
○	●	○	●	Sensor test ready, 1/2-sensor not functioning
●	○	○	●	Sensor test ready, 3/4-sensor not functioning
○	●	●	●	Sensor test ready, 1/4-sensor and 1/2-sensor not functioning
●	○	●	●	Sensor test ready, 1/4-sensor and 3/4-sensor not functioning
●	●	○	●	Sensor test ready, 1/2-sensor and 3/4-sensor not functioning
●	●	●	●	Sensor test ready, no sensors functioning
○	○	○	●	When measuring Tank is empty
○	○	●	○	Tank level 1/4
○	●	○	○	Tank level 1/2
●	○	○	○	Tank level 3/4
○	○	○	☼	Tank is empty, Gobius is measuring
○	○	☼	○	Tank level 1/4, Gobius is measuring
○	☼	○	○	Tank level 1/2, Gobius is measuring
☼	○	○	○	Tank level 3/4, Gobius is measuring
●	●	●	○	At delivery Gobius is not yet calibrated
☼	☼	☼	○	When calibrating Gobius is calibrating

● = light ○ = no light ☼ = flashing light



Indicators in Set-up Mode

Mark your choose	Lamp Blue	Lamp Green	Lamp Yellow	Lamp Red	Duration	Description
	●	●	●	●	5 s	Calibration
	○	●	○	○	5 s	Measurement period 1 minute
D	○	●	○	●	5 s	Measurement period 5 minutes
	○	●	●	○	5 s	Measurement period 10 minutes
	○	●	●	●	5 s	Measurement period 20 minutes
	●	○	○	○	5 s	Tank in plastic, 5 - 12 mm, fibre glass 4 - 8 mm
	●	○	○	●	5 s	Tank in plastic 2 – 5 mm
	●	○	●	○	5 s	Tank in stainless steel 1,25 – 2 mm
D	●	○	●	●	5 s	Tank in stainless steel 2 - 3 mm, steel 2 - 3 mm, aluminum 3 - 5 mm
	●	●	○	○	5 s	Gauge 4 – 20 mA, Industrial std
D	●	●	○	●	5 s	Gauge 10 – 180 Ω , European Std
	●	●	●	○	5 s	Gauge 240 – 33 Ω , US std
	○	○	○	○	N/A	Will remain in this state until the button is released. The set-up mode will be exited without changing any parameters.

D = Default setting ● = light ○ = no light

Output current/resistance to gauge

Level	Output current/resistance		
	Industrial standard 4-20 mA current loop	European standard 10 – 180 Ω	US standard 240 – 33 Ω
0	6 mA	23 Ω	214 Ω
1/4	10 mA	68 Ω	161 Ω
1/2	14 mA	112 Ω	109 Ω
3/4	18 mA	158 Ω	56 Ω

Supply Voltage:	10 ~ 29 V DC
Supply Current:	200 mA maximum (Operating)
	40 mA maximum (Idle)
Lamp driver outputs:	
Max. voltage:	29 V DC
Max. current:	200 mA
Analogue Instrument (Gauge) Outputs:	Industrial standard, 4-20 mA current loop European standard 10-180 Ω US standard 240-33 Ω
Temperature interval:	-10 min, +60 max Celsius - +14 min, +140 max Fahrenheit
Max. voltage:	29V DC

Control Unit

Analogue output

Power input

Lamp 1, above upper sensor

Lamp 2, below lowest sensor

Gauge Eur. or US standard.

Gauge Industry std 4-20 mA

Optional resistor for 24 Volts system

Battery 12/24V

Fuse, 500 mA

White/Grey

Black

Yellow

Green

Red

Black

Blue

Red

Black

1 Yellow

4 Black

1 Yellow

2 Green

3 Red

4 Black

Please note that only one gauge can be connected at the same time.

Thank you for choosing Gobius from FM Marin!

Please do not forget to register your Gobius products on www.fmmarin.se, Products, in order to receive free technical support