
Rudder Position Indicator Installation Guide

~ with Reset Adjustment~

Seaworld's Rudder Position Indicator designed to fit most of the sport boat's steering hub without hiring any specialist. Resetting center alignment needs only a small screwdriver.

Before starting, please make sure:

- 1. Your steering wheel position and rudder are located at center position.
- 2. Steering cap (hub) surface must be at least flat in diameter 2" (51mm) or slightly convex is acceptable.



Part # 17130

Amstructions

- Step 1. Wash and clean the steering cap (hub), rinse and wipe dry. Remove light soil and dirt. (Especially on the installation surface)
- Step 2. Remove protective film from the adhesive. (See Diagram A) Then mount it onto the steering cap and press against cap.

Self-adnesive foam with thickness of 2mm





Diagram A

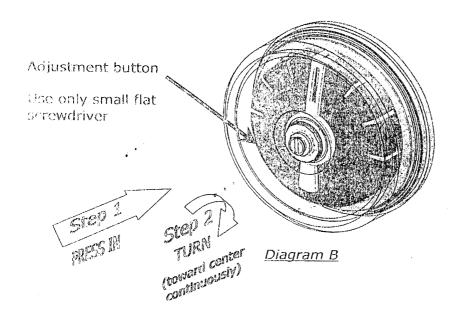

Reset Center (If the pointer is not lined up with the center mark)

- Step 1. Use a small flat screwdriver (size #1 or #2) press in the adjustment button. (See diagram B)
- Step 2. While pressing the button in, turn until the pointer swings slowly back to center.
- Step 3. Make sure the button completely pops back up. You may wiggle screwdriver a little, allowing button to click, before releasing the adjustment button.

Capanthampe

- Do not force button to turn, which may damage the indicator. Press in and then turn.
- Water may leak into the indicator if button does not pop up properly.