



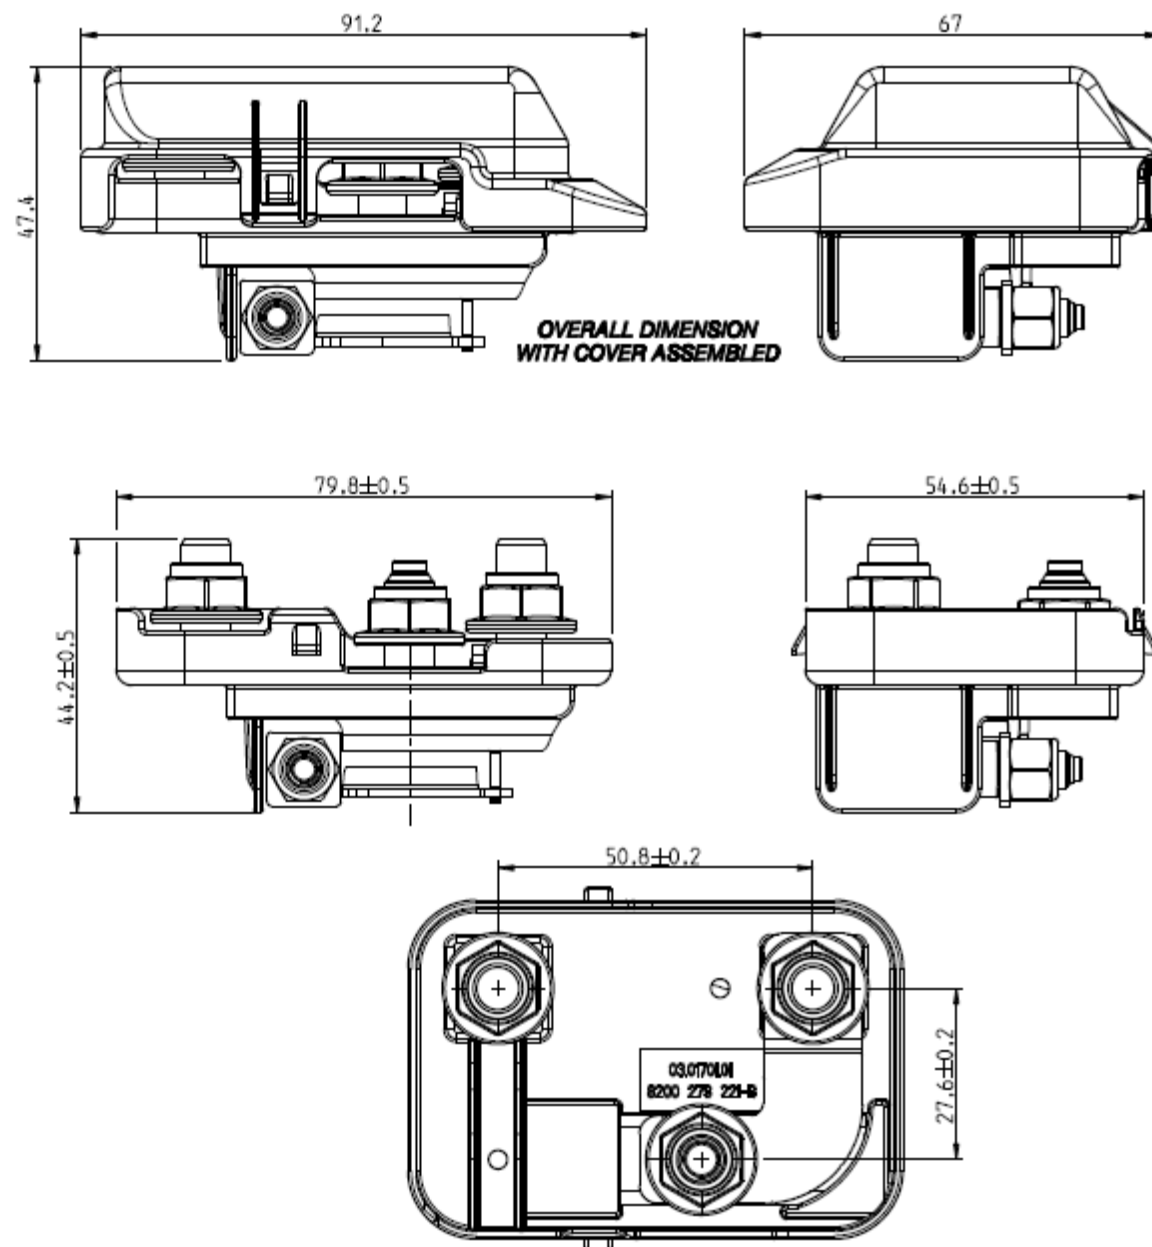

SUPPLY STATUS

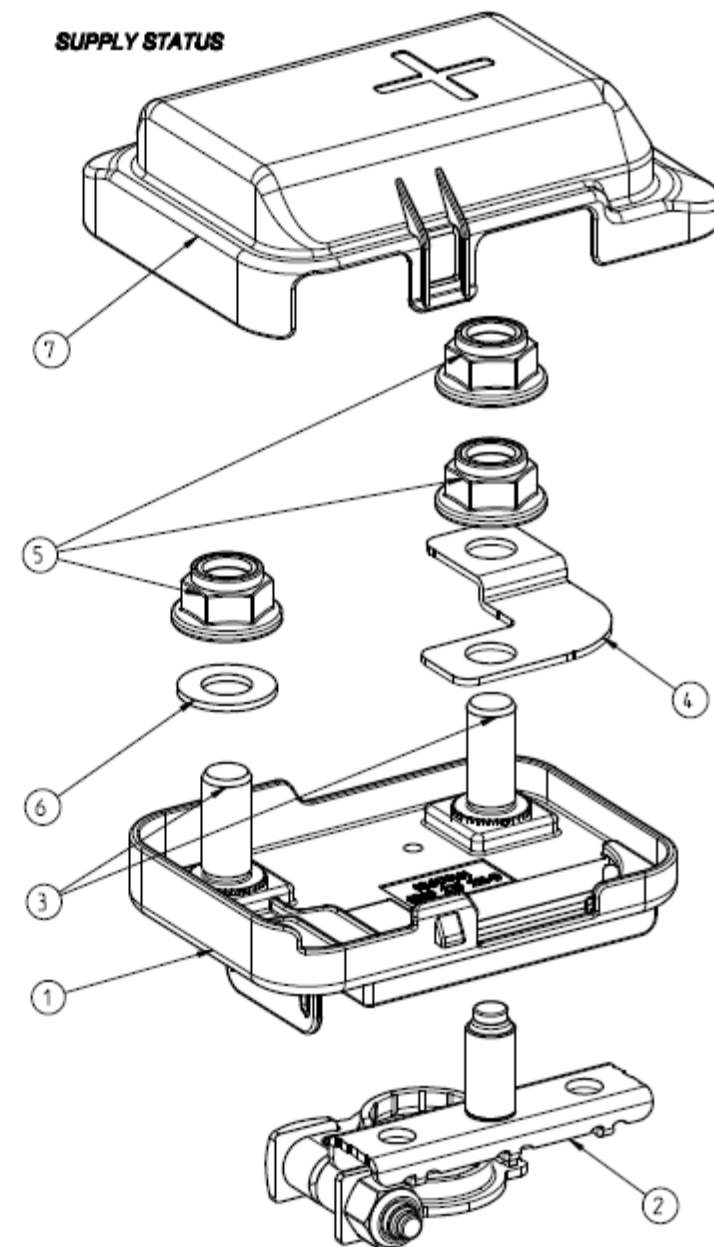

OPERATING FEATURES

FEATURES	UNIT	VALUE
V max	V	32
T. min - T. max (FUSE BOX)	°C	-40 / +120
T. min - T. max (COVER)	°C	-30 / +100
I max	A	250
IP	IEC 529	10
Flammability	UL 94	HB
TIGHTENING TORQUE M8	Nm	11 ±20%
TIGHTENING TORQUE M6	Nm	4.5 ±20%

7	1	COVER	PP BLACK
6	1	SPACER	STEEL AISI 304
5	3	SELF-LOCKING NUT M8	STEEL CL6.8
4	1	SUPPLY STRIP	Cu/Sn 3
3	2	SCREW M8	STEEL CL8.8
2	1	POSITIVE BATTERY TERMINAL	-
1	1	FUSE SUPPORT	PBT-GF20 BLACK
POS	Q.ty	DENOMINATION	MATERIAL